


aerospace  
climate control  
**electromechanical**  
filtration  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding



## SMB / SMH Series

Low Inertia Servo Motors

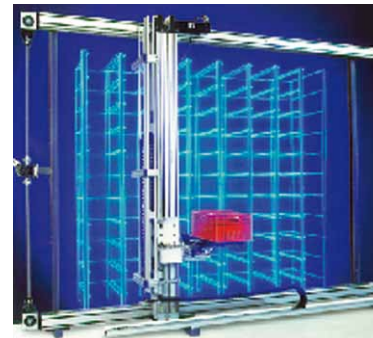

ENGINEERING YOUR SUCCESS.



**WARNING – USER RESPONSIBILITY**

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

<b>Overview .....</b>	<b>5</b>
<b>Technical Characteristics.....</b>	<b>6</b>
Technical Data.....	6
Speed Torque Curves .....	8
Dimensions .....	10
<b>Accessories and Options .....</b>	<b>11</b>
Brake.....	11
Medium Inertia.....	11
Feedback .....	11
<b>Associated Drives .....</b>	<b>14</b>
230 VAC supply voltage .....	14
400 VAC supply voltage .....	15
<b>Order Code.....</b>	<b>16</b>
Serie SMB.....	16
Serie SMH .....	18
Motor Power Cable for SMB Motors.....	19
Feedback Cable for SMB Motors .....	19
Motor Power Cable for SMH Motors.....	20
Feedback Cable for SMH Motors .....	20

# Parker Hannifin

- the global leader in motion and control technologies

A world class player on a local stage

## Global Product Design

Parker Hannifin has more than 40 years experience in the design and manufacturing of drives, controls, motors and mechanical products. With dedicated global product development teams, Parker draws on industry-leading technological leadership and experience from engineering teams in Europe, North America and Asia.

## Local Application Expertise

Parker has local engineering resources committed to adapting and applying our current products and technologies to best fit our customers' needs.

## Manufacturing to Meet Our Customers' Needs

Parker is committed to meeting the increasing service demands that our customers require to succeed in the global industrial market. Parker's manufacturing teams seek continuous improvement through the implementation of lean manufacturing methods throughout the process. We measure ourselves on meeting our customers' expectations of quality and delivery, not just our own. In order to meet these expectations, Parker operates and continues to invest in our manufacturing facilities in Europe, North America and Asia.

## Worldwide Manufacturing Locations

### Europe

Littlehampton, United Kingdom  
Dijon, France  
Offenburg, Germany  
Milan, Italy

### Asia

Shanghai, China  
Chennai, India

### North America

Rohnert Park, California  
Irwin, Pennsylvania  
Wadsworth, Ohio  
Charlotte, North Carolina  
New Ulm, Minnesota



Offenburg, Germany

## Local Manufacturing and Support in Europe

Parker provides sales assistance and local technical support through a network of dedicated sales teams and authorized technical distributors throughout Europe.


For contact information, please refer to the Sales Offices on the back cover of this document or visit [www.parker.com](http://www.parker.com)



Milan, Italy



Littlehampton, UK

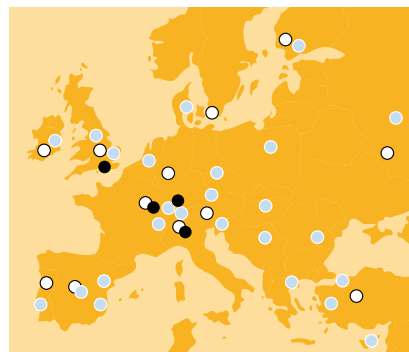

- Manufacturing
- Parker Sales Offices
- Distributors



Dijon, France

# Low Inertia Servo Motors - SMB / SMH

## Overview

### Description

The SMB / SMH\* Series of highly-dynamic brushless servo motors have been design to combine the cutting-edge technology of Parker Hannifin products with an extremely high performance.

Thanks to the innovative “salient pole” technology, the motor’s dimensions are considerably reduced with significant advantages in terms of specific torque, overall dimensions and dynamic performance. Compared to traditional-technology brushless servo motors, the specific torque is approximately 30 % higher, overall dimensions are considerably reduced and, consequently rotor inertias are extremely low. Thanks to the high quality of Neodymium-Iron-Boron magnets, and also the encapsulation method used to fasten them to the shaft, the SMB/H motors can achieve very high acceleration and withstand high overloads without risk of demagnetisation or detachment of the magnets.

Specific applications for the SMB/H Series include all types especially those for the packaging and handling industry, and all those applications where very high dynamic performances and very low inertias are required.

### Features

- High number of feedback options
- Customised windings/voltages
- Increased Inertia option
- Multiple connection options

### Application

- Food, Pharma & Beverage
- Packaging Machines
- Material Forming
- Material Handling
- Factory Automation
- Life Science Diagnostic
- Automotive Industry / In-Plant
- Printing Industry
- Textile Machines
- Robotics
- Servo Hydraulic Pumps



### Technical Characteristics - Overview

<b>Motor Type</b>	Permanent magnets synchronous servomotor
<b>Rotor Design</b>	Rotor with surface rare earth magnets
<b>Number of poles</b>	10 for SM_ 42 8 for SM_ 60-82-100-115-142
<b>Power Range</b>	0.2 – 5.3 kW
<b>Torque Range</b>	0.35 – 17 Nm
<b>Speed Range</b>	0 – 7500 min <sup>-1</sup>
<b>Mounting</b>	Flange with smooth holes
<b>Shaft End</b>	Plain keyed shaft Plain smooth shaft (option)
<b>Cooling</b>	Natural ventilation
<b>Protection Level (IEC60034-5)</b>	IP64 IP65 (option)
<b>Feedback sensor</b>	Resolver Absolute Endat or Hiperface Incremental Encoder
<b>Other options</b>	Brake Thermal protection (PTC for SMB and KTY for SMH) Increased inertia
<b>Marking</b>	CE / UL
<b>Voltage Supply</b>	230 / 400 VAC other voltage uder request
<b>Temperature Class</b>	Class F
<b>Connections</b>	Connectors Flying cables Terminal Box (see table option for combination)

\* SMB: for Drives TPD-M, SLVD-N, TWIN-N, SPD-N, Hi-Drive  
SMH: for Drive Compax3

# Technical Characteristics

## Technical Data

### 230 VAC supply voltage

Model <sup>(4)</sup>	Size	Stall <sup>(1)</sup>		Nominal <sup>(1)</sup>			Peak <sup>(1)</sup>	Inertia		Ke <sup>(2) (3)</sup>	Kt <sup>(2) (3)</sup>
		Torque	Current	Torque	Speed	Current	Torque	No brake	With brake		
		T <sub>065</sub> (T <sub>105</sub> ) [Nm]	I <sub>065</sub> [A]	T <sub>n065</sub> [Nm]	n [min <sup>-1</sup> ]	I <sub>n065</sub> [A]	T <sub>max</sub> [Nm]	J [kgmm <sup>2</sup> ]	J [kgmm <sup>2</sup> ]	Ke [Vs]	Kt [Nm/A <sub>rms</sub> ]
SM_42 60 0.35	42	0.35 0.45	0.78	0.15	6000	0.38	0.9	13	n.a.	0.29	0.46
SM_60 30 0.55	60	0.55 (0.68)	0.7	0.50	3000	0.66	1.7	18	30.5	0.44	0.76
SM_60 45 0.55			1.0	0.39	4500	0.74				0.30	0.53
SM_60 60 0.55			1.4	0.24	6000	0.60				0.23	0.40
SM_60 16 1.4		1.4 (1.7)	0.95	1.35	1600	0.91	4.4	30	42.5	0.85	1.48
SM_60 30 1.4			1.73	1.20	3000	1.50				0.47	0.81
SM_60 45 1.4			2.37	1.00	4500	1.69				0.34	0.59
SM_60 60 1.4			2.98	0.80	6000	1.70				0.27	0.47
SM_60 75 1.4			3.85	0.15	7500	0.41				0.21	0.36
SM_82 10 03	82	3 (3.7)	1.2	2.9	1000	1.2	9	140	183	1.43	2.48
SM_82 16 03			1.8	2.9	1600	1.7				0.96	1.66
SM_82 30 03			3.1	2.7	3000	2.8				0.55	0.96
SM_82 33 03			3.5	2.4	3300	2.8				0.49	0.85
SM_82 45 03			4.7	2.2	4500	3.4				0.37	0.64
SM_82 60 03			6.1	1.5	6000	3.1				0.28	0.49
SM_82 75 03			7.5	0.6	7500	1.6				0.23	0.40
SM_100 16 06	100	6 (9)	3.7	5.8	1600	3.6	18	336	440	0.92	1.60
SM_100 30 06			5.9	5.0	3000	4.9				0.59	1.02
SM_100 45 06			9.4	3.5	4500	5.5				0.37	0.64
SM_100 55 06			11.8	2.6	5500	5.1				0.29	0.51
SM_100 75 06			14.7	0.6	7500	1.5				0.24	0.41
SM_115 16 10	115	10 (12.5)	6.0	9.0	1600	5.4	32	900	1000	0.96	1.66
SM_115 30 10			10.5	8.0	3000	8.4				0.55	0.95
SM_115 40 10			14.7	7.6	4000	11.2				0.39	0.68
SM_115 54 10			18.2	7.1	5400	12.9				0.32	0.55
SM_142 18 15	142	15 (19)	9.7	13.3	1800	8.6	47	1400	1600	0.89	1.54
SM_142 30 15			16.0	12.5	3000	13.4				0.54	0.94

<sup>(1)</sup> Data referred to motor mounted on a steel flange in horizontal position with dim. 200x230x20 mm (for SM\_60,82), dim. 200x270x20 mm (for SM\_100,115,142). Stall torques refer to motor turning at 100 min<sup>-1</sup>

<sup>(2)</sup> Data measured at 20 °C. When "hot" consider 5 % derating

<sup>(3)</sup> Tolerance data ±10 %

<sup>(4)</sup> SMB: for Drives TPD-M, SLVD-N, TwinN, SPDN, Hi-Drive  
 SMH: for Drive Compax3



400 VAC power supply

Model <sup>(4)</sup>	Size	Stall <sup>(1)</sup>		Nominal <sup>(1)</sup>			Peak <sup>(1)</sup>	Inertia		Ke <sup>(2) (3)</sup>	Kt <sup>(2) (3)</sup>
		Torque	Current	Torque	Speed	Current	Torque	No brake	With brake		
		$T_{065}$ ( $T_{105}$ ) [Nm]	$I_{065}$ [A]	$T_{n065}$ [Nm]	n [min <sup>-1</sup> ]	$I_{n065}$ [A]	$T_{max}$ [Nm]	J [kgmm <sup>2</sup> ]	J [kgmm <sup>2</sup> ]	Ke [Vs]	Kt [Nm/A <sub>rms</sub> ]
SM_60 30 1.4	60	1.4 (1.7)	0.95	1.2	3000	0.81	4.4	30	42.5	0.81	1.48
SM_60 45 1.4			1.37	1.0	4500	0.98				0.59	1.02
SM_60 60 1.4			1.73	0.8	6000	0.99				0.68	0.81
SM_60 75 1.4			2.15	0.15	7500	0.23				0.38	0.65
SM_82 30 03	82	3 (3.7)	1.8	2.7	3000	1.6	9	140	183	0.96	1.66
SM_82 45 03			2.7	2.2	4500	2.0				0.64	1.11
SM_82 56 03			3.1	1.6	5600	1.7				0.55	0.96
SM_82 60 03			3.5	1.7	6000	2.0				0.49	0.85
SM_82 75 03			4.4	0.6	7500	0.9			0.39	0.68	
SM_100 30 06	100	6 (9)	3.7	5.0	3000	3.1	18	336	440	0.92	1.60
SM_100 45 06			5.6	3.5	4500	3.3				0.62	1.07
SM_100 56 06			5.9	2.5	5600	2.4				0.59	1.02
SM_100 75 06			9.4	0.6	7500	0.9				0.37	0.64
SM_115 20 10	115	10 (12.5)	4.5	9.0	2000	4.06	32	900	1000	1.28	2.22
SM_115 30 10			6.0	8.0	3000	4.82				0.96	1.66
SM_115 40 10			8.0	7.6	4000	6.05				0.73	1.26
SM_115 56 10			10.5	6.0	5600	6.30				0.55	0.95
SM_142 20 15	142	15 (19)	6.4	13.0	2000	5.5	47	1400	1600	1.36	2.35
SM_142 30 15			9.7	12.5	3000	8.1				0.89	1.54
SM_142 45 15			14.4	10.9	4500	10.5				0.60	1.04
SM_142 56 15			16.0	9.2	5600	9.8				0.54	0.94
SM_170 10 36	170	available on request									
SM_170 27 36											

<sup>(1)</sup> Data referred to motor mounted on a steel flange in horizontal position with dim. 200x230x20 mm (for SM\_60,82), dim. 200x270x20 mm (for SM\_100,115,142). Stall torques refer to motor turning at 100 min<sup>-1</sup>

<sup>(2)</sup> Data measured at 20 °C. When "hot" consider 5 % derating

<sup>(3)</sup> Tolerance data ±10 %

<sup>(4)</sup> SMB: for Drives TPD-M, SLVD-N, TwinN, SPDN, Hi-Drive  
SMH: for Drive Compax3

**STANDARDS**

In compliance with: 73/23/CEE and 93/68/CEE


- EN60034-1
- EN60034-5
- EN60034-5/A1
- EN60034-9
- EN60034-14

Marked  Marked  (except SM\_42)

## Speed Torque Curves


### SMB/H42

6000 min<sup>-1</sup> 230 V

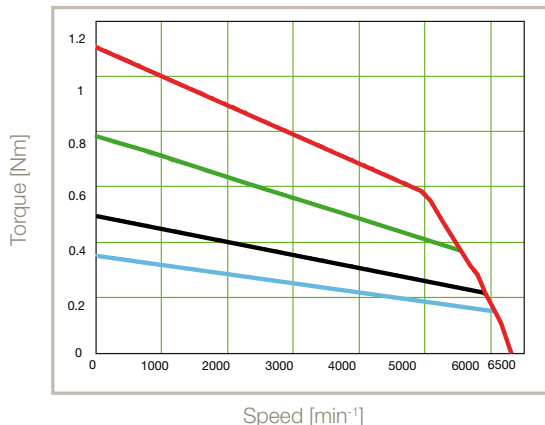


### SMB/H82

1600 min<sup>-1</sup> 230 V - 3000 min<sup>-1</sup> 400 V

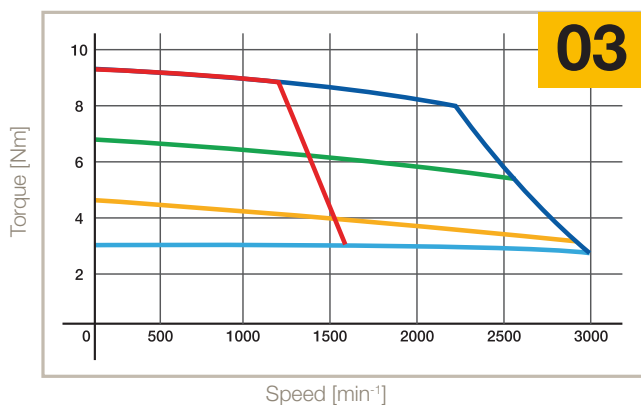


3000 min<sup>-1</sup> 230 V - 5600 min<sup>-1</sup> 400 V

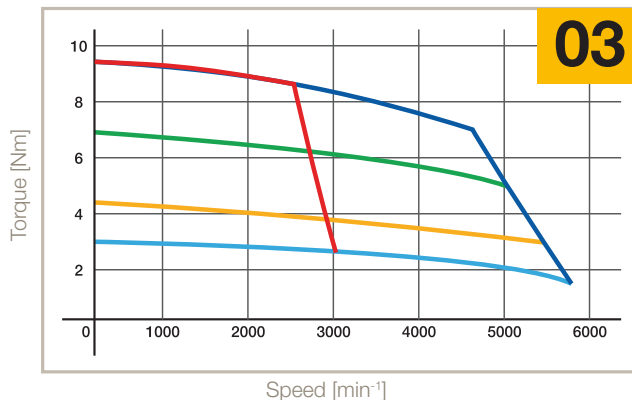


### SMB/H115

1600 min<sup>-1</sup> 230 V - 3000 min<sup>-1</sup> 400 V

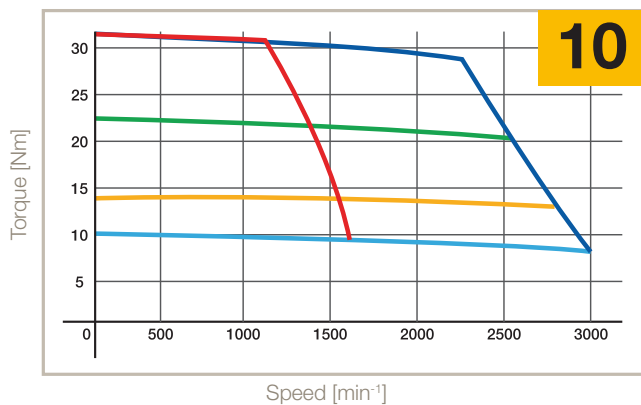

3000 min<sup>-1</sup> 230 V - 5600 min<sup>-1</sup> 400 V

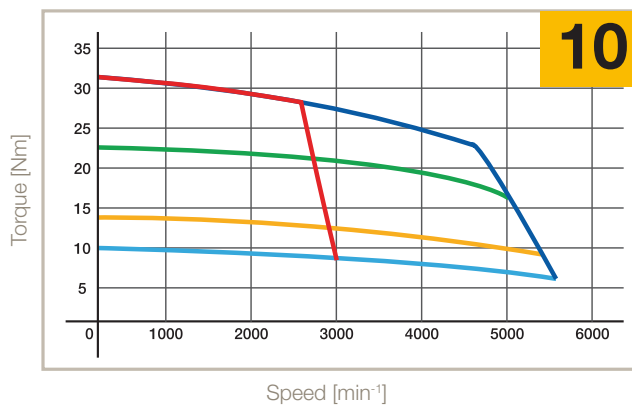


- S1 65 K, ΔT
- S3 10 %, 5 min, 400 V
- S3 50 %, 5 min
- S3 10 %, 5 min, 230 V
- S3 50 %, 5 min
- S3 20 %, 5 min




**SMB/H60**

1600 min<sup>-1</sup> 230 V - 3000 min<sup>-1</sup> 400 V

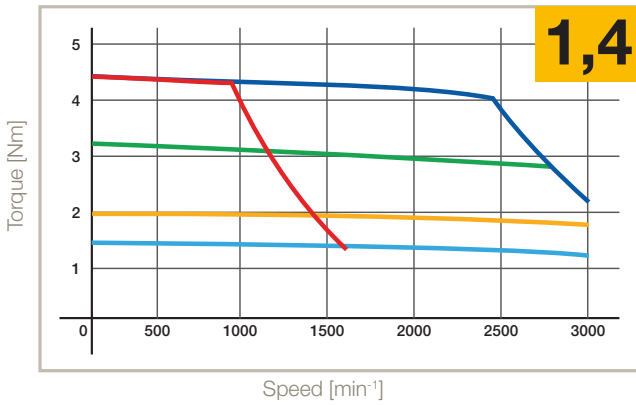


3000 min<sup>-1</sup> 230 V - 6000 min<sup>-1</sup> 400 V

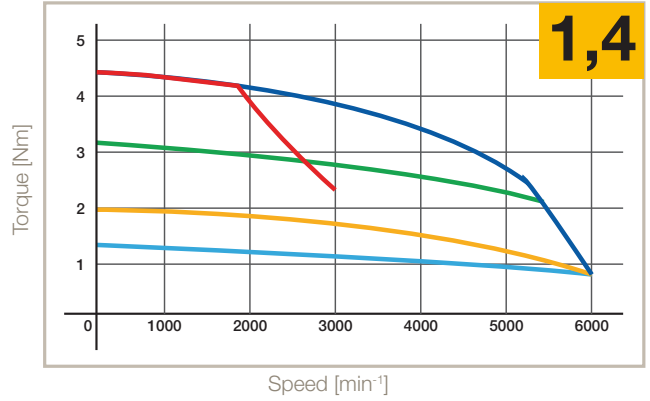


**SMB/H100**

1600 min<sup>-1</sup> 230 V - 3000 min<sup>-1</sup> 400 V

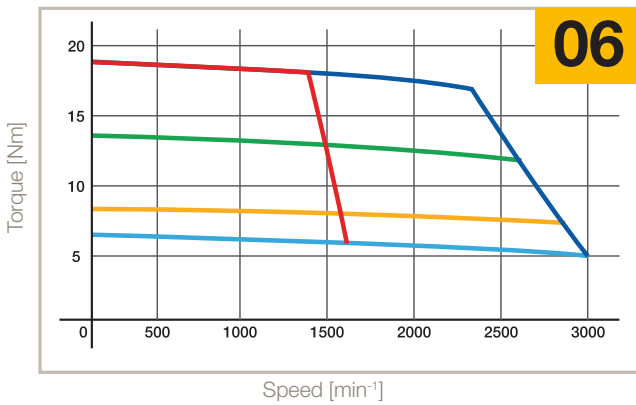


3000 min<sup>-1</sup> 230 V - 5600 min<sup>-1</sup> 400 V

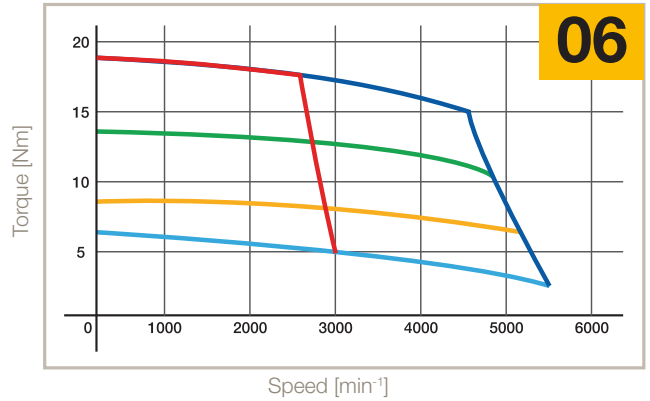


**SMB/H142**

1800 min<sup>-1</sup> 230 V - 3000 min<sup>-1</sup> 400 V

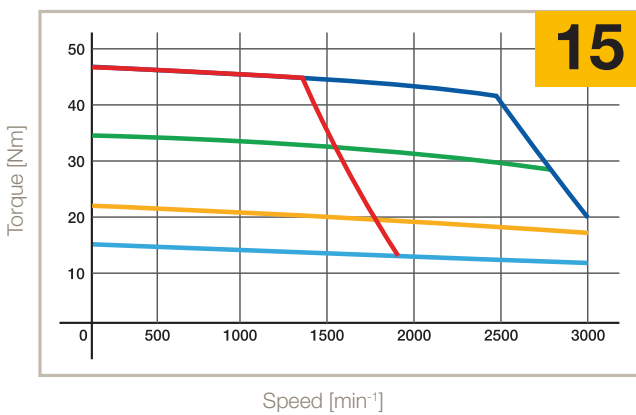


3000 min<sup>-1</sup> 230 V - 5600 min<sup>-1</sup> 400 V

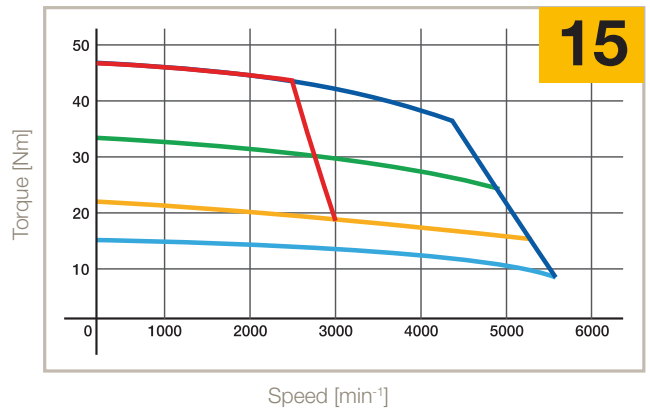

- S1 65 K, ΔT
- S3 10 %, 5 min, 400 V
- S3 10 %, 5 min, 230 V
- S3 50 %, 5 min
- S3 50 %, 5 min
- S3 20 %, 5 min

Dimensions

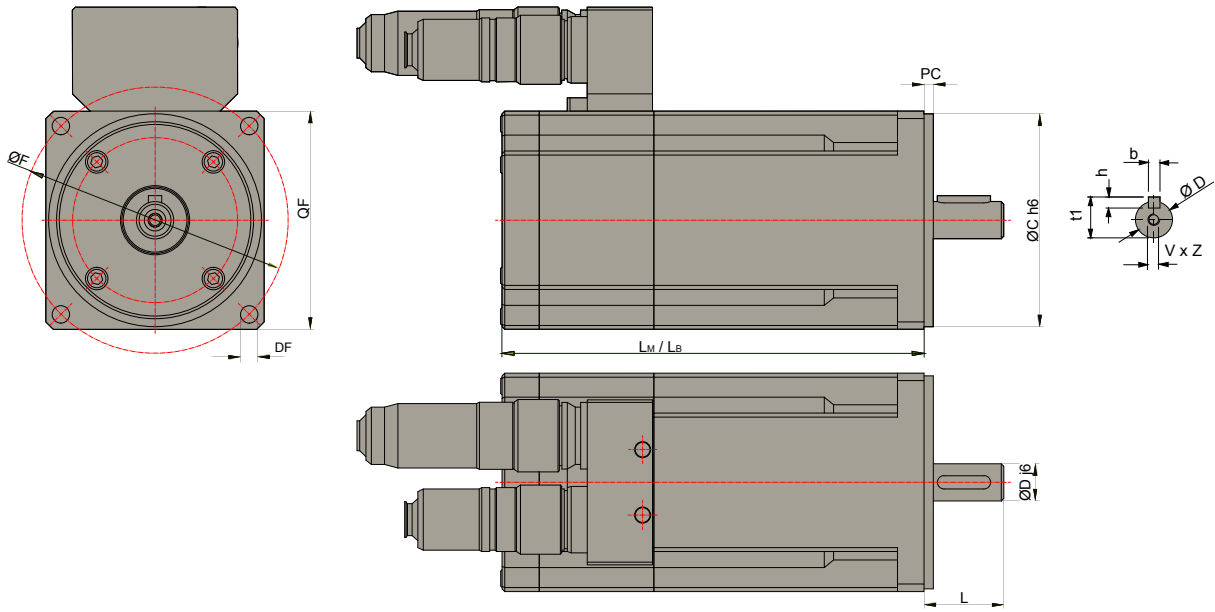

Motors Size		LM LB	Weight	DxL	bxh	t1	VxZ	C	F	DF	G	PC	QF	Order Code QF	
SMB / H	42	0.35	110	0.85	9x25	-	-	M3x9	30	50	3.2	57	2.5	42	5
	60	0.55	88	-	9x20	3x3	10.2	-	40	63	5.5	74	-	60	8
			137	1	11x23	4x4	12.5	M4x10	60	75	6	90	2.5	70	5
		1.4	129.5	1.5	9x20	3x3	10.2	M4x10	40	63	5.5	74	2.5	60	8
			161		11x23	4x4	12.5		60	75	6	90	2.5	70	5
	82	03	159	3.6	11x23 <sup>(2)</sup>	4x4	12.5	M4x12	60	75	6	90	3.5	70	7
			202		14x30	5x5	16	M4x12	80	100	6.5	112	3.5	82	8
		206.5	14x30	6x6	21.5	M5x12.5	95	115	9	135	3.5	100	5		
	100	06	191.5	4.7	19x40	6x6	21.5	M6x16	80	100	7	135	3.5	100	8
			238.5		24x50	8x7	27	M8x19	95	115	9	135	3.5	100	5
	115	10	220	7.7	19x40	6x6	21.5	M6x16	95	115	9	156	3.5	115	9
					24x50	8x7	27	M8x19	95	130	9	156	3.5	115	8
					28x60	8x7	31	M10x22	110	130	9	156	3.5	130	7
					28x60	8x7	31	M10x22	130	165	11	196.5	3.5	145	5
	142	15	243	13	19x40	6x6	21.5	M6x16	130	165	11	192.5	3.5	142	5
			293		24x50	8x7	27	M8x19							
				28x60	8x7	31	M10x22								

**LM:** motor's length without brake and with resolver  
**LB:** motor's length with brake and resolver  
**DxL:** Shaft  
**bxh:** Key  
**T1:** Overall shaft height  
**VxZ:** Shaft hole depth

**C:** Center  
**DF:** Fixing holes  
**QF:** Mounting flange  
**F:** Pitch circle diameter  
**G:** Diagonal Dimension  
**PC:** Centre Depth  
<sup>(1)</sup> not available with flange 7  
<sup>(2)</sup> only for torque <2 Nm

## Accessories and Options

### Brake

Motor	Voltage [V]	Current [A]	Torque @ 20 °C [Nm]	Added length [mm]	Added weight [kg]
SM_60	24	0.34	2.2	31.5	0.3
SM_82	24	0.5	5	45.5	0.7
SM_100	24	0.67	11	47	0.6
SM_115	24	0.67	11	45	2
SM_142	24	0.75	22	50	3

### Medium Inertia

Motor	Added inertia [kgmm <sup>2</sup> ]	Added length [mm]	Added weight [kg]
SM_60	29	31.5	0.32
SM_82	270	43	0.91
SM_100	284	47	0.68
SM_115	900	45	2.28
SM_142	690	50	2.49

### Feedback

#### Resolver

Poles	2
Transformation ratio	0.5
Operating temperature	-50 .. +150 °C
SM_ associations	All Sizes

#### Incremental Encoder with Hall Sensor

Code	A1	A2	A3	B3	C4	D3
Resolution [C/T]	2000	2048	4096	2048	5000	5000
Poles	8					
System accuracy	±32"	±32"	±16"	±32"	±13"	±13"
Voltage	+5 VDC ±5 % - 200 mA					
Reference mark	Yes					
Max speed [min <sup>-1</sup> ]	6000					
Output circuit	Line drive differential mode 20 mA					
Operating temperature	-20 °C .. +100 °C	-20 °C .. +85 °C	-20 °C .. +100 °C	-20 °C .. +85 °C	-20 °C .. +100 °C	-20 °C .. +85 °C
SM_ motors associations						
SM_42	N	N	N	N	N	N
SM_60	N	N	N	Y	N	Y
SM_82	Y	Y	Y	N	Y	N
SM_100	Y	Y	Y	N	Y	N
SM_115	Y	Y	Y	N	Y	N
SM_142	Y	Y	Y	N	Y	N


### Hiperface Absolute Encoder

Code	S1	S2	S3	S4	A6	A7	C6	C7	G4	G5
Type	Optical								Capacitive	
Turn	Single	Multi	Single	Multi	Single	Multi	Single	Multi	Multi	Multi
Incremental signals	1 V <sub>PP</sub>									
Line count	1024		128		1024		128		16	16
Resolution	32 768 (15 bit)		4096 (12 bit)		32 768 (15 bit)		4096 (12 bit)			
Absolute rotation	1	4096	1	4096	1	4096	1	4096	512	512
System accuracy	±45"		±320"		±45"		±320"		±288"	
Power supply	8 VDC									
Max speed [min <sup>-1</sup> ]	6000		12000	9000	6000		12000	9000	6000	
Temperature	-20 °C .. +115 °C		-20 °C .. +110 °C		-20 °C .. +115 °C		-20 °C .. +110 °C		-20 °C .. +115 °C	
Safety integrity level:	SIL2 (IEC 61508), SILCL2 (IEC 62061)				Not Available					
<b>SM_ motors associations</b>										
SM_42	N	N	N	N	N	N	N	Y	N	N
SM_60	O	O	Y	Y	O	O	Y	Y	Y	N
SM_82	Y	Y	N	N	Y	Y	N	N	N	Y
SM_100	Y	Y	N	N	Y	Y	N	N	N	Y
SM_115	Y	Y	N	N	Y	Y	N	N	N	Y
SM_142	Y	Y	N	N	Y	Y	N	N	N	Y

### EnDat Absolute Encoder

Code	B9	C1	D5	F2	F4
Type	Inductive	Optical			Inductive
Turn	Multi	Single	Multi		
Incremental signals	1 V <sub>PP</sub>				
Line count	32	512			16
Positions per revolutions	131 072 (17 bit)	8192 (13 bit)			262 144 (18 bit)
Distinguishable revolutions	4096	1	4096		
System accuracy	±400"	±60"			±480"
Power supply	5 VDC				
Max speed [min <sup>-1</sup> ]	12000		7000	12000	
Temperature	-20 °C .. +115 °C	-40 °C .. +115 °C	-30 °C .. +115 °C	-40 °C .. +115 °C	-20 °C .. +115 °C
Absolute position values	EnDat 2.1	EnDat 2.2			EnDat 2.1
Safety integrity level:	Not Available				
<b>SM_ motors associations</b>					
SM_42	N	N	N	N	N
SM_60	Y	Y	N	Y	Y
SM_82	Y	Y	Y	N	N
SM_100	Y	Y	Y	N	N
SM_115	Y	Y	Y	N	N
SM_142	Y	Y	Y	N	N

## Layout and connectors

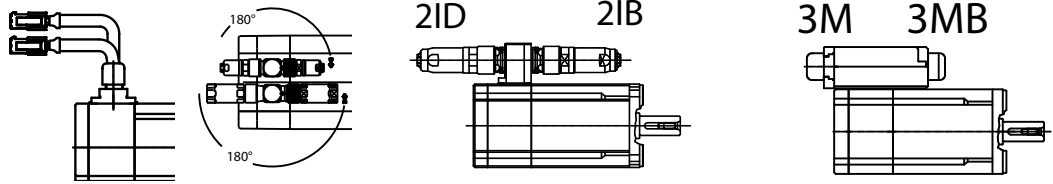

	200 mm Flying leads with molex plugs 0V	2x Parallel up-right connectors 2I	2x Forward facing connectors 2IB	2x Rear facing connectors 2ID	Terminal box rear facing 3M	Terminal box forward facing 3MB
SMB_42	Y	N	N	N	N	N
SMB_60	Y	Y	Y	Y	Y	Y
SMB_82	N	Y	Y	Y	Y	Y
SMB_100	N	Y	Y	Y	Y	Y
SMB_115	N	Y	Y	Y	Y	Y
SMB_142	N	Y	Y	Y	Y	Y
SMH_42	Y	N	N	N	N	N
SMH_60	Y	Y	Y	N	N	N
SMH_82	N	Y	Y	N	N	N
SMH_100	N	Y	Y	N	N	N
SMH_115	N	Y	Y	N	N	N
SMH_142	N	Y	Y	N	N	N
SME_42	Y	N	N	N	N	N
SME_60	N	N	Y	Y	N	N
SME_82	N	N	Y	Y	N	N
SME_100	N	N	Y	Y	N	N
SME_115	N	Y	N	N	N	N
SME_142	N	Y	N	N	N	N

## Associated Drives

### 230 VAC supply voltage

Motor	Rated Speed [min <sup>-1</sup> ]	Stall Current [A]	SLVD-N	TPD-M	Compax3	638
<b>230 VAC supply voltage</b>						
<b>SM_42_60_0.35</b>	6000	0.78	SLVD1N...	TPD-M02...	C3S025V2...	638A-01-3-F...
<b>SM_60_30_0.55</b>	3000	0.7	SLVD1N...	TPD-M02...	C3S025V2...	638A-01-3-F...
<b>SM_60_45_0.55</b>	4500	1	SLVD1N...	TPD-M02...	C3S025V2...	638A-01-3-F...
<b>SM_60_60_0.55</b>	6000	1.4	SLVD2N...	TPD-M02...	C3S025V2...	638A-02-3-F...
<b>SM_60_16_1.4</b>	1600	0.95	SLVD1N...	TPD-M02...	C3S025V2...	638A-01-3-F...
<b>SM_60_30_1.4</b>	3000	1.73	SLVD2N...	TPD-M02...	C3S025V2...	638A-02-3-F...
<b>SM_60_45_1.4</b>	4500	2.37	SLVD5N...	TPD-M05...	C3S063V2...	638A-04-3-F...
<b>SM_60_60_1.4</b>	6000	2.98	SLVD5N...	TPD-M05...	C3S063V2...	638A-04-3-F...
<b>SM_60_75_1.4</b>	7500	3.85	SLVD5N...	TPD-M05...	C3S063V2...	638A-04-3-F...
<b>SM_82_10_03</b>	1000	1.2	SLVD2N...	TPD-M02...	C3S025V2...	638A-02-3-F...
<b>SM_82_16_03</b>	1600	1.8	SLVD2N...	TPD-M02...	C3S025V2...	638A-02-3-F...
<b>SM_82_30_03</b>	3000	3.1	SLVD5N...	TPD-M05...	C3S063V2...	638A-04-3-F...
<b>SM_82_33_03</b>	3300	3.5	SLVD5N...	TPD-M05...	C3S063V2...	638A-04-3-F...
<b>SM_82_45_03</b>	4500	4.7	SLVD5N...	TPD-M05...	C3S063V2...	638A-06-3-F...
<b>SM_82_60_03</b>	6000	6.1	SLVD7N...	TPD-M08...	C3S063V2...	638B-08-3-F...
<b>SM_82_75_03</b>	7500	7.5	SLVD7N...	TPD-M08...	C3S100V2...	638B-08-3-F...
<b>SM_100_16_06</b>	1600	3.7	SLVD5N...	TPD-M05...	C3S063V2...	638A-04-3-F...
<b>SM_100_30_06</b>	3000	5.9	SLVD7N...	TPD-M08...	C3S063V2...	638A-06-3-F...
<b>SM_100_45_06</b>	4500	9.4	SLVD10N...	TPD-M10...	C3S100V2...	638B-10-3-F...
<b>SM_100_55_06</b>	5500	11.8	SLVD15N...	TPD-M15...	C3S150V2...	638B-15-3-F...
<b>SM_100_75_06</b>	7500	14.7	SLVD15N...	TPD-M15...	C3S150V2...	638B-15-3-F...
<b>SM_115_16_10</b>	1600	6	SLVD7N...	TPD-M08...	C3S063V2...	638A-06-3-F...
<b>SM_115_30_10</b>	3000	10.5	SLVD10N...	TPD-M10...	C3S100V2...	638B-10-3-F...
<b>SM_115_40_10</b>	4000	14.7	SLVD15N...	TPD-M15...	C3S150V2...	638B-15-3-F...
<b>SM_115_54_10</b>	5400	18.2	n.a.	TPD-M30...	n.a.	n.a.
<b>SM_142_18_15</b>	1800	9.7	SLVD10N...	TPD-M10...	C3S100V2...	638B-10-3-F...
<b>SM_142_30_15</b>	3000	16	SLVD17N...	TPD-M30...	n.a.	n.a.

## 400 VAC supply voltage

Motor	Rated Speed [min <sup>-1</sup> ]	Stall Current [A]	SPD-N/TWIN-N	TPD-M	Compax3	638
<b>400 VAC supply voltage</b>						
<b>SM_60 30 1.4</b>	3000	0.95	SPD2N.. / TWIN2N	TPD-M02..	C3S015V4..	638B-03-6-F...
<b>SM_60 45 1.4</b>	4500	1.37	SPD2N.. / TWIN2N	TPD-M02..	C3S015V4..	638B-03-6-F...
<b>SM_60 60 1.4</b>	6000	1.73	SPD2N.. / TWIN2N	TPD-M02..	C3S038V4..	638B-03-6-F...
<b>SM_60 75 1.4</b>	7500	2.15	SPD5N.. / TWIN5N	TPD-M05..	C3S038V4..	638B-03-6-F...
<b>SM_82 30 03</b>	3000	1.8	SPD2N.. / TWIN2N	TPD-M02..	C3S038V4..	638B-03-6-F...
<b>SM_82 45 03</b>	4500	2.7	SPD5N.. / TWIN5N	TPD-M05..	C3S038V4..	638B-05-6-F...
<b>SM_82 56 03</b>	5600	3.1	SPD5N.. / TWIN5N	TPD-M05..	C3S038V4..	638B-05-6-F...
<b>SM_82 60 03</b>	6000	3.5	SPD5N.. / TWIN5N	TPD-M05..	C3S038V4..	638B-05-6-F...
<b>SM_82 75 03</b>	7500	4.4	SPD5N.. / TWIN5N	TPD-M05..	C3S075V4..	638B-05-6-F...
<b>SM_100 30 06</b>	3000	3.7	SPD5N.. / TWIN5N	TPD-M05..	C3S038V4..	638B-05-6-F...
<b>SM_100 45 06</b>	4500	5.6	SPD8N.. / TWIN8N	TPD-M08..	C3S075V4..	638B-08-6-F...
<b>SM_100 56 06</b>	5600	5.9	SPD8N.. / TWIN8N	TPD-M08..	C3S075V4..	638B-08-6-F...
<b>SM_100 75 06</b>	7500	9.4	SPD16N..		C3S150V4..	638B-10-6-F...
<b>SM_115 20 10</b>	2000	4.5	SPD5N.. / TWIN5N	TPD-M05..	C3S075V4..	638B-05-6-F...
<b>SM_115 30 10</b>	3000	6.0	SPD8N.. / TWIN8N	TPD-M08..	C3S075V4..	638B-08-6-F...
<b>SM_115 40 10</b>	4000	8.0	SPD8N.. / TWIN8N	TPD-M08..	C3S150V4..	638B-10-6-F...
<b>SM_115 56 10</b>	5600	10.5	SPD16N..	TPD-M15..	C3S150V4..	638B-15-6-F...
<b>SM_142 20 15</b>	2000	6.4	SPD8N.. / TWIN8N	TPD-M08..	C3S075V4..	638B-08-6-F...
<b>SM_142 30 15</b>	3000	9.7	SPD16N..	TPD-M10..	C3S150V4..	638B-10-6-F...
<b>SM_142 45 15</b>	4500	14.4	SPD16N..	TPD-M15..	C3S150V4..	638B-15-6-F...
<b>SM_142 56 15</b>	5600	16	SPD16N..	TPD-M30..	C3S300V4..	n.a.



# Order Code

## Serie SMB

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Order example	SMB	A	60	30	1.4	5	9		2I		64	A6		M		2

### 1 Type Of Motor (mandatory field)

<b>SME</b>	Standard Motor with Encoder MB Series
<b>SMB</b>	Standard Motor with Resolver MB Series

### 2 Brake Option

	No Brake Option (empty field)
<b>A</b>	Motor with Holding Brake (brakes when the supply voltage is 0)

### 3 Motor Frame Size (mandatory field)

<b>42</b>	Torque 0,35 Nm
<b>60</b>	Torque range 0,55...1.4 Nm
<b>82</b>	Torque 3 Nm
<b>100</b>	Torque range 6 Nm
<b>115</b>	Torque range 10 Nm
<b>142</b>	Torque range 15...17 Nm
<b>170</b>	Torque range 36...60 Nm (Provisional data)

### 4 Winding (mandatory field)

<b>nn</b>	min <sup>-1</sup> (x100)
-----------	--------------------------

### 5 Motor Torque (mandatory field)

<b>nn</b>	Torque [Nm]
-----------	-------------

### 6 Flange (mandatory field)

<b>5</b>	B5 Flange
<b>7</b>	Only for Frame 82 and 115
<b>8</b>	Only for Frame 60, 82, 100 and 115
<b>9</b>	Only for Frame 115
<b>A B C</b>	Special Flange

### 7 Shaft (mandatory field)

<b>9</b>	9x25 mm for size 42 - 9x20 mm for size 60
<b>11</b>	11x23 mm for size 60
<b>14</b>	14x30 mm for size 82
<b>19</b>	19x40 mm for size 82/100/115/142
<b>24</b>	24x50 mm for size 100/115/142
<b>28</b>	28x60 mm for size 115/142
<b>A*</b>	Special shaft under request

### 8 Key Shaft option

	Shaft with Key (empty field)
<b>S</b>	Shaft without key

### 9 Layout - Connectors (mandatory field)

<b>0V</b>	Cable exit and Molex Flying connectors - 200 mm above
<b>2I</b>	Rotatable Interconnectron receptacles
<b>2IB</b>	90° Interconnectron receptacles - forward facing
<b>2ID</b>	90° Interconnectron receptacles - rear facing
<b>DC</b>	Special Customer Layout

### 10 Female connectors option

	With Female / flying connectors (empty field)
<b>W</b>	Without Female / flying connectors

### 11 Protection Degree (mandatory field)

<b>64</b>	IP64
<b>65</b>	IP65

### 12 Feedback

<b>Exx</b>	Prearrangement for external encoder mounting Where xx is the model of feedback
<b>A1</b>	Encoder 1024 ppr + Hall - TAMAGAWA OIH48
<b>A2</b>	Encoder 2048 ppr + Hall - TAMAGAWA OIH48
<b>A3</b>	Encoder 4096 ppr + Hall - TAMAGAWA OIH48
<b>A6</b>	SinCos Hiperface Encoder Single-Turn - STEGMANN SRS50/52
<b>A7</b>	SinCos Hiperface Encoder Multi-Turn - STEGMANN SRS50/52
<b>B3</b>	Encoder 2048 ppr + Hall - TAMAGAWA OIH35
<b>B9</b>	SinCos EnDat Encoder Multi-Turn - HEIDENHAIN EQI1331
<b>C1</b>	SinCos EnDat Encoder Single-Turn - HEIDENHAIN EQI1113
<b>C4</b>	Encoder 5000 ppr + Hall - TAMAGAWA OIH48
<b>C6</b>	SinCos Hiperface Encoder Single-Turn - STEGMANN SKS36
<b>C7</b>	SinCos Hiperface Encoder Multi-Turn - STEGMANN SKM36
<b>D3</b>	Encoder 5000ppr + Hall - TAMAGAWA OIH35
<b>D5</b>	SinCos EnDat Encoder Multi-Turn - HEIDENHAIN EQN1325
<b>F2</b>	SinCos EnDat Encoder Multi-Turn - HEIDENHAIN EQN1125
<b>F4</b>	SinCos EnDat Encoder Multi-Turn - HEIDENHAIN EQI1130
<b>G4</b>	SinCos Hiperface Encoder Multi-Turn - STEGMANN SEL37
<b>G5</b>	SinCos Hiperface Encoder Multi-Turn - STEGMANN SEL52
<b>S1</b>	SinCos Hiperface Encoder Single-Turn - STEGMANN SRS50S
<b>S2</b>	SinCos Hiperface Encoder Multi-Turn - STEGMANN SRS50S
<b>S3</b>	SinCos Hiperface Encoder Single-Turn - STEGMANN SKS36S
<b>S4</b>	SinCos Hiperface Encoder Multi-Turn - STEGMANN SKM36S

### 13 Option Resolver

	Standard Resolver (empty field)
<b>H</b>	High Accuracy Resolver

**14 Option Inertia**

	Standard Inertia (empty field)
<b>M</b>	Medium Inertia

**15 Special Option**

	No Special Option (empty field)
<b>1Bxx</b>	Motor with 2-side output shaft, where xx is the diameter of second shaft

**16 Voltage**

<b>0A</b>	24 V
<b>0B</b>	34 V
<b>0C</b>	48 V
<b>0D</b>	50 V
<b>0E</b>	60 V
<b>0F</b>	72 V
<b>0G</b>	74 V
<b>0</b>	80 V
<b>0H</b>	96 V
<b>1A</b>	108-110 V
<b>1D</b>	120 V
<b>1B</b>	125 V
<b>1C</b>	150 V
<b>1</b>	180 V
<b>2</b>	220-230 V
<b>2A</b>	222 V
<b>2B</b>	200 V
<b>3</b>	330 V
<b>4</b>	380-400 V
<b>4A</b>	425 V
<b>4C</b>	460 V
<b>4B</b>	490 V

# Order Code

## Serie SMH

	1	2	3	4	5	6	7	8	9	10	11	12	13
Order example	SMH	A	60	30	1.4	5	9		2I	64	A6	M	2

### 1 Type Of Motor (mandatory field)

**SMH** Standard Motor with Resolver MH Series

### 2 Brake Option

No Brake Option (empty field)

**A** Motor with Holding Brake  
(brakes when the supply voltage is 0)

### 3 Motor Frame Size (mandatory field)

**42** Torque 0,35 Nm

**60** Torque range 0,55...1.4 Nm

**82** Torque 3 Nm

**100** Torque range 6 Nm

**115** Torque range 10 Nm

**142** Torque range 15...17 Nm

### 4 Winding (mandatory field)

**nn** min<sup>-1</sup> (x100)

### 5 Motor Torque (mandatory field)

**nn** Torque [Nm]

### 6 Flange (mandatory field)

**5** B5 Flange

**7** Only for Frame 82 and 115

**8** Only for Frame 60, 82, 100 and 115

**9** Only for Frame 115

**A B C** Special Flange

### 7 Shaft (mandatory field)

**9** 9x25 mm for size 42 - 9x20 mm for size 60

**11** 11x23 mm for size 60

**14** 14x30 mm for size 82

**19** 19x40 mm for size 82/100/115/142

**24** 24x50 mm for size 100/115/142

**28** 28x60 mm for size 115/142

### 8 Key Shaft option

Shaft with Key (empty field)

**S** Shaft without key

### 9 Layout - Connectors (mandatory field)

**0V** Cable exit and Molex Flying connectors -  
200 mm above

**2I** Rotatable Interconnectron receptacles

**2IB** 90° Interconnectron receptacles - forward  
facing

**2ID** 90° Interconnectron receptacles - rear facing

### 10 Protection Degree (mandatory field)

**64** IP64

**65** IP65

### 11 Feedback

**A6** SinCos Hiperface Encoder Single-Turn -  
STEGMANN SRS50/52

**A7** SinCos Hiperface Encoder Multi-Turn -  
STEGMANN SRS50/52

**C6** SinCos Hiperface Encoder Single-Turn -  
STEGMANN SKS36

**C7** SinCos Hiperface Encoder Multi-Turn -  
STEGMANN SKM36

**G4** SinCos Hiperface Encoder Multi-Turn -  
STEGMANN SEL37

**G5** SinCos Hiperface Encoder Multi-Turn -  
STEGMANN SEL52

**S1** SinCos Hiperface Encoder Single-Turn -  
STEGMANN SRS50S

**S2** SinCos Hiperface Encoder Multi-Turn -  
STEGMANN SRS50S

**S3** SinCos Hiperface Encoder Single-Turn -  
STEGMANN SKS36S

**S4** SinCos Hiperface Encoder Multi-Turn -  
STEGMANN SKM36S

### 12 Option Inertia

Standard Inertia (empty field)

**M** Medium Inertia

### 13 Voltage

**2** 220-230 V

**4** 380-400 V

## Order Code

### Motor Power Cable for SMB Motors

	1	2	3	4	5	6	7
Order example	CAVOMOT	A	1,5	5	PM	I	40

<b>1 CAVOMOT</b>	
<b>CAVOMOT</b>	Power cable drive - motor
<b>2 Brake wire</b>	
<b>empty field</b>	without brake wire
<b>A</b>	Brake wire
<b>3 Section [mm<sup>2</sup>]</b>	
<b>1,5</b>	1,5 mm <sup>2</sup>
<b>2,5</b>	2,5 mm <sup>2</sup>
<b>4, 6, 10, 25</b>	4 mm <sup>2</sup> , 6 mm <sup>2</sup> , 10 mm <sup>2</sup> , 25 mm <sup>2</sup> (not for "PF" type)
<b>4 Length [m]</b>	
<b>1, ...</b>	Length in metre
<b>5 Application Type</b>	
<b>PM</b>	Standard cable
<b>PF</b>	High flex cable
<b>6 Motor Connector</b>	
<b>M</b>	Military Connector (Mil) [All Layout except 08 and 5]
<b>8</b>	Military Connector (Mil) [All Layout 8]
<b>I</b>	Interconnectron Connector (all layout)
<b>3</b>	Terminal Connection Box (all layout except 3M/3MB/3MC/3MA)
<b>S</b>	Terminal Connection Box layout 3M/3M/3MC/3MA
<b>SY</b>	Terminal Connection for MBX motors (Cable no ATEX)
<b>SL</b>	Terminal connection box layout 6i only for MB205 motor
<b>F</b>	Fast Connector (layout SMB42 0V)
<b>A</b>	Amphenol Connector (layout SM_40 0P, 1A, 1C, 2DA, ...)
<b>T</b>	Trilogy Connector
<b>SL</b>	Terminal connection box layout 6i only for MB205 motor
<b>PRM</b>	Patch Cord Military Connector (Mil) [All Layout except 08]
<b>7 Motor Size</b>	
<b>40..265</b>	<b>Motor Size</b>
<b>M50</b>	Trilogy Motor
<b>NX</b>	Motors NX2-3-4-6 type NX----AKR70--

### Feedback Cable for SMB Motors

	1	2	3	4	5
Order example	CAVORES	4	PM	I	SLVDN

<b>1 Signal Cable type</b>	
<b>CAVORES</b>	Resolver
<b>CAVOENC</b>	Incremental encoder
<b>CAVOABS</b>	Absolute Encoder EnDat+SinCos
<b>CAVOHIP</b>	Absolute Encoder Hiperface+SinCos
<b>CAVOSIN</b>	SinCos Encoder
<b>CAVOHAL</b>	SinCos Encoder + Hall sensor
<b>2 Length [m]</b>	
<b>1, ...</b>	Length in metre
<b>3 Application Type</b>	
<b>PM</b>	Moving Application
<b>4 Motor Connector</b>	
<b>M</b>	Military Connector (Mil) [All Layout except 08]
<b>8</b>	Military Connector (Mil) [All Layout 8]
<b>I</b>	Interconnectron Connector (all layout)
<b>S</b>	Terminal Connection Box layout 3M/3M/3MC/3MA and motor MBX
<b>F</b>	Fast Connector (layout SMB40 0V)
<b>A</b>	Amphenol Connecotr (layout SMB40 0P, 1A, 1C, 2DA, ...)
<b>T</b>	Trilogy Connector
<b>NX</b>	Motors NX2-3-4-6-8 type NX----AKR7---
<b>E</b>	Free signal cable for EX motors
<b>PRM</b>	Patch Cord Military Connector (Mil) [All Layout except 08] 08]
<b>5 Drive Type</b>	
<b>LVD</b>	LVD Drive
<b>HPD</b>	HPD Drive
<b>SLVD</b>	SLVD e SLVD-N Drive
<b>SLVDN</b>	SLVD-N Drive
<b>TPD</b>	TPD-M
<b>SPD/TWIN</b>	TWIN_N e SPD_N Drive or wire without connector drive side
<b>HIDRIVE</b>	Hi-Drive
<b>631</b>	Servodrives 631
<b>638</b>	Servodrives 638
<b>637F</b>	Servodrives 637F

## Order Code

### Motor Power Cable for SMH Motors

	1	2
Order example:	<b>MOK</b>	<b>55/02</b>

<b>1</b>	<b>Cable</b>
	<b>MOK</b> Motor cable <sup>(2)</sup>
<b>2</b>	<b>Type</b>
	<b>for SMH / MH56 / MH70 / MH105 <sup>(3)</sup></b>
<b>55/....<sup>(1)</sup></b>	1,5 mm <sup>2</sup> ; up to 13,8 A
<b>54/....<sup>(1)</sup></b>	1,5 mm <sup>2</sup> ; up to 13,8 A Moving application
<b>56/....<sup>(1)</sup></b>	2,5 mm <sup>2</sup> ; up to 18,9 A
<b>57/....<sup>(1)</sup></b>	2,5 mm <sup>2</sup> ; up to 18,9 A Moving application
	<b>for MH145 / MH205 <sup>(4)</sup></b>
<b>60/....<sup>(1)</sup></b>	1,5 mm <sup>2</sup> ; up to 13,8 A
<b>63/....<sup>(1)</sup></b>	1,5 mm <sup>2</sup> ; up to 13,8 A Moving application
<b>59/....<sup>(1)</sup></b>	2,5 mm <sup>2</sup> ; up to 18,9 A
<b>64/....<sup>(1)</sup></b>	2,5 mm <sup>2</sup> ; up to 18,9 A Moving application
<b>61/....<sup>(1)</sup></b>	6 mm <sup>2</sup> ; up to 32,3 A Moving application
<b>62/....<sup>(1)</sup></b>	10 mm <sup>2</sup> ; up to 47,3 A Moving application

MOK55 and MOK54 are also possible for linear motors LXR406, LXR412 and BLMA.

### Length code for cables

<sup>(1)</sup> Length code 1 (Example: SSK01/09 = length 25 m)

Length [m]	1,0	2,5	5,0	7,5	10,0	12,5	15,0	20,0	25,0	30,0	35,0	40,0	45,0	50,0
Order code	01	02	03	04	05	06	07	08	09	10	11	12	13	14

<sup>(2)</sup> Color according to DESINA

<sup>(3)</sup> with motor connector

<sup>(4)</sup> with cable eye for motor terminal box

### Feedback Cable for SMH Motors

	1
Order example:	<b>REK42/02</b>

<b>1</b>	<b>Zubehör</b>
	<b>for MH/SMH-Motors</b>
<b>REK42/....<sup>(1)</sup></b>	Resolver cable <sup>(2)</sup>
<b>REK41/....<sup>(1)</sup></b>	Resolver cable <sup>(2)</sup> Moving application
<b>GBK24/....<sup>(1)</sup></b>	SinCos© Feedback cable <sup>(2)</sup> Moving application
<b>GBK38/....<sup>(1)</sup></b>	EnDat 2.1 Feedback cable <sup>(2)</sup> Moving application
<b>GBK23/....<sup>(1)</sup></b>	Encoder cable <sup>(2)</sup>
	<b>for linear motors</b>
<b>GBK33/....<sup>(1)</sup></b>	Feedback cable for LXR Moving application
<b>GBK32/....<sup>(1)</sup></b>	Feedback cable for BLMA Moving application







# Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 00800 27 27 5374.



## AEROSPACE

### Key Markets

- Aircraft engines
- Business & general aviation
- Commercial transports
- Land-based weapons systems
- Military aircraft
- Missiles & launch vehicles
- Regional transports
- Unmanned aerial vehicles

### Key Products

- Flight control systems & components
- Fluid conveyance systems
- Fluid metering delivery & atomization devices
- Fuel systems & components
- Hydraulic systems & components
- Inert nitrogen generating systems
- Pneumatic systems & components
- Wheels & brakes



## CLIMATE CONTROL

### Key Markets

- Agriculture
- Air conditioning
- Food, beverage & dairy
- Life sciences & medical
- Precision cooling
- Processing
- Transportation

### Key Products

- CO<sup>2</sup> controls
- Electronic controllers
- Filter driers
- Hand shut-off valves
- Hose & fittings
- Pressure regulating valves
- Refrigerant distributors
- Safety relief valves
- Solenoid valves
- Thermostatic expansion valves



## ELECTROMECHANICAL

### Key Markets

- Aerospace
- Factory automation
- Food & beverage
- Life science & medical
- Machine tools
- Packaging machinery
- Paper machinery
- Plastics machinery & converting
- Primary metals
- Semiconductor & electronics
- Textile
- Wire & cable

### Key Products

- AC/DC drives & systems
- Electric actuators
- Controllers
- Gantry robots
- Gearheads
- Human machine interfaces
- Industrial PCs
- Inverters
- Linear motors, slides and stages
- Precision stages
- Stepper motors
- Servo motors, drives & controls
- Structural extrusions



## FILTRATION

### Key Markets

- Food & beverage
- Industrial machinery
- Life sciences
- Marine
- Mobile equipment
- Oil & gas
- Power generation
- Process
- Transportation

### Key Products

- Analytical gas generators
- Compressed air & gas filters
- Condition monitoring
- Engine air, fuel & oil filtration & systems
- Hydraulic, lubrication & coolant filters
- Process, chemical, water & microfiltration filters
- Nitrogen, hydrogen & zero air generators



## FLUID & GAS HANDLING

### Key Markets

- Aerospace
- Agriculture
- Bulk chemical handling
- Construction machinery
- Food & beverage
- Fuel & gas delivery
- Industrial machinery
- Mobile
- Oil & gas
- Transportation
- Welding

### Key Products

- Brass fittings & valves
- Diagnostic equipment
- Fluid conveyance systems
- Industrial hose
- PTFE & PFA hose, tubing & plastic fittings
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



## HYDRAULICS

### Key Markets

- Aerospace
- Aerial lift
- Agriculture
- Construction machinery
- Forestry
- Industrial machinery
- Mining
- Oil & gas
- Power generation & energy
- Truck hydraulics

### Key Products

- Diagnostic equipment
- Hydraulic cylinders & accumulators
- Hydraulic motors & pumps
- Hydraulic systems
- Hydraulic valves & controls
- Power take-offs
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



## PNEUMATICS

### Key Markets

- Aerospace
- Conveyor & material handling
- Factory automation
- Food & beverage
- Life science & medical
- Machine tools
- Packaging machinery
- Transportation & automotive

### Key Products

- Air preparation
- Compact cylinders
- Field bus valve systems
- Grippers
- Guided cylinders
- Manifolds
- Miniature fluidics
- Pneumatic accessories
- Pneumatic actuators & grippers
- Pneumatic valves and controls
- Rodless cylinders
- Rotary actuators
- Tie rod cylinders
- Vacuum generators, cups & sensors



## PROCESS CONTROL

### Key Markets

- Chemical & refining
- Food, beverage & dairy
- Medical & dental
- Microelectronics
- Oil & gas
- Power generation

### Key Products

- Analytical sample conditioning products & systems
- Fluoropolymer chemical delivery fittings, valves & pumps
- High purity gas delivery fittings, valves & regulators
- Instrumentation fittings, valves & regulators
- Medium pressure fittings & valves
- Process control manifolds



## SEALING & SHIELDING

### Key Markets

- Aerospace
- Chemical processing
- Consumer
- Energy, oil & gas
- Fluid power
- General industrial
- Information technology
- Life sciences
- Military
- Semiconductor
- Telecommunications
- Transportation

### Key Products

- Dynamic seals
- Elastomeric o-rings
- EMI shielding
- Extruded & precision-cut, fabricated elastomeric seals
- Homogeneous & inserted elastomeric shapes
- High temperature metal seals
- Metal & plastic retained composite seals
- Thermal management

# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates,**  
Dubai

Tel: +971 4 8127100  
parker.me@parker.com

**AT – Austria,** Wiener Neustadt

Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe,** Wiener  
Neustadt

Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AZ – Azerbaijan,** Baku

Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium,** Nivelles

Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BY – Belarus,** Minsk

Tel: +375 17 209 9399  
parker.belarus@parker.com

**CH – Switzerland,** Etoy

Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CZ – Czech Republic,** Klecany

Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany,** Kaarst

Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark,** Ballerup

Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain,** Madrid

Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland,** Vantaa

Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France,** Contamine s/Arve

Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece,** Athens

Tel: +30 210 933 6450  
parker.greece@parker.com

**HU – Hungary,** Budapest

Tel: +36 1 220 4155  
parker.hungary@parker.com

**IE – Ireland,** Dublin

Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IT – Italy,** Corsico (MI)

Tel: +39 02 45 19 21  
parker.italy@parker.com

**KZ – Kazakhstan,** Almaty

Tel: +7 7272 505 800  
parker.easteurope@parker.com

**NL – The Netherlands,** Oldenzaal

Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway,** Asker

Tel: +47 66 75 34 00  
parker.norway@parker.com

**PL – Poland,** Warsaw

Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal,** Leca da Palmeira

Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania,** Bucharest

Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia,** Moscow

Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden,** Spånga

Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SK – Slovakia,** Banská Bystrica

Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia,** Novo Mesto

Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TR – Turkey,** Istanbul

Tel: +90 216 4997081  
parker.turkey@parker.com

**UA – Ukraine,** Kiev

Tel +380 44 494 2731  
parker.ukraine@parker.com

**UK – United Kingdom,** Warwick

Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**ZA – South Africa,** Kempton Park

Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

**CA – Canada,** Milton, Ontario

Tel: +1 905 693 3000

**US – USA,** Cleveland

Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia,** Castle Hill

Tel: +61 (0)2-9634 7777

**CN – China,** Shanghai

Tel: +86 21 2899 5000

**HK – Hong Kong**

Tel: +852 2428 8008

**IN – India,** Mumbai

Tel: +91 22 6513 7081-85

**JP – Japan,** Tokyo

Tel: +81 (0)3 6408 3901

**KR – South Korea,** Seoul

Tel: +82 2 559 0400

**MY – Malaysia,** Shah Alam

Tel: +60 3 7849 0800

**NZ – New Zealand,** Mt Wellington

Tel: +64 9 574 1744

**SG – Singapore**

Tel: +65 6887 6300

**TH – Thailand,** Bangkok

Tel: +662 186 7000-99

**TW – Taiwan,** Taipei

Tel: +886 2 2298 8987

## South America

**AR – Argentina,** Buenos Aires

Tel: +54 3327 44 4129

**BR – Brazil,** Sao Jose dos Campos

Tel: +55 800 727 5374

**CL – Chile,** Santiago

Tel: +56 2 623 1216

**MX – Mexico,** Apodaca

Tel: +52 81 8156 6000

We reserve the right to make technical changes. The data correspond to the technical state at the time of printing.  
© 2011 Parker Hannifin Corporation.  
All rights reserved.

192-061013N2

November 2011



### EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL,  
IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

### US Product Information Centre

Toll-free number: 1-800-27 27 537

www.parker.com

Your local authorized Parker distributor