



aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
**hydraulics**  
pneumatics  
process control  
sealing & shielding




# PLD6 and PLD130 Auxiliary Valves

Direct-Acting Pressure Relief Valves



ENGINEERING YOUR SUCCESS.

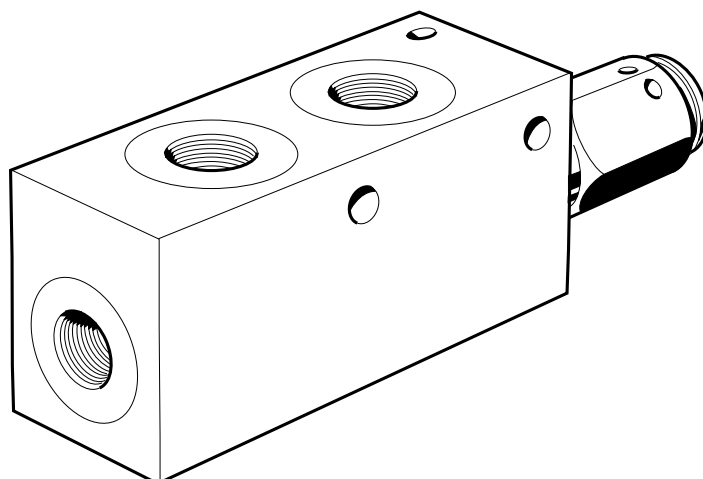

## Applications

The PLD6 is a direct operated pressure relief valve, adjustable within 4 different pressure ranges.

With its exceptionally good opening and closing characteristics, the PLD6 is intended primarily for use in pilot circuits in hydraulic and electro-hydraulic remote control systems. It can, however, be used to advantage in any hydraulic circuit where a pressure relief valve of this size is required.

## Construction and function

The valve housing is of nodular iron, with two (alternative) pressure ports and one tank port.

The direct-acting pressure-relief insert is of a well-proven design used in many Parker directional valves.

Pressure setting is effected easily by means of an external hexagonal sleeve. The valve housing and hexagonal sleeve are furnished with holes to enable sealing with wire.

The valve can be supplied factory-set at the desired pressure level, and factory-sealed if required. In either case, the pressure setting is stated on a sticker on the valve.

## Technical data

### Pressure setting ranges

Working pressure

15- 70 bar	217-1015 psi
71-150 bar	1016-2175 psi
151-210 bar	2176-3045 psi
211-300 bar	3046-4350 psi

### Pressure-setting flow

The pressure is set at a flow of 20 l/min (5.3 USgpm) through the pressure relief valve.

### Recommended flow rates

Max. 25 l/min at settings below 100 bar.  
 (6.6 USgpm at settings below 1450 psi)  
 Max. 40 l/min at settings above 100 bar.  
 (10.6 USgpm at settings below 1450 psi)

### Connection ports

All connections are available in two versions:

- G version (BSP pipe thread) for flat seal (type Tredo) according to ISO 228/1.
- UN version for O-ring seal according to SAE J1926/1.

### Weight

Approx. 0.3 kg (0.7 lb).

## Hydraulic fluids

Best performance is obtained using mineral-base oil of high quality and cleanliness in the hydraulic system.

HLP hydraulic fluids (DIN 51524), automatic-gearbox oil type A and API CD engine oils can be used. Synthetic, fire-resistant and environmentally friendly fluids can also be used. Please contact VOAC for further information.

For best function, fluid viscosity should be between 15 and 45 mm<sup>2</sup>/s (cSt).

### Filtration

Filtration should be arranged so that Target Contamination Class 20/18/14 according to ISO 4406 is not exceeded.

### Temperature


Temperature range (fluid):  
 -20 to +70 °C (-4 to 158 °F).  
 Temperature range (ambient):  
 -40 °C to +60 °C (-40 to 140 °F).  
 Temperature change: max. 100 °C/s (212 °F).

## General


The data given is applicable at a fluid temperature of 50 °C (122 °F) and viscosity of 30 mm<sup>2</sup>/s (cSt) using mineral-base oil according to DIN 51524.

## Features and benefits


- Small dimensions - easy to install
- Very tight - no unnecessary leakage losses
- Very good pressure override characteristic - minimal pressure change between different flows
- Very good opening and closing characteristics - right pressure regardless of flow
- Low hysteresis - good pressure-maintaining precision
- Fast acting - quick response to pressure surges
- Great adjustability - only four different pressure ranges, from 15 to 300 bar
- Tolerates high pressure surges in tank port (up to 300 bar) - long service life
- Sealable - discourages unauthorized intervention and shows evidence of tampering

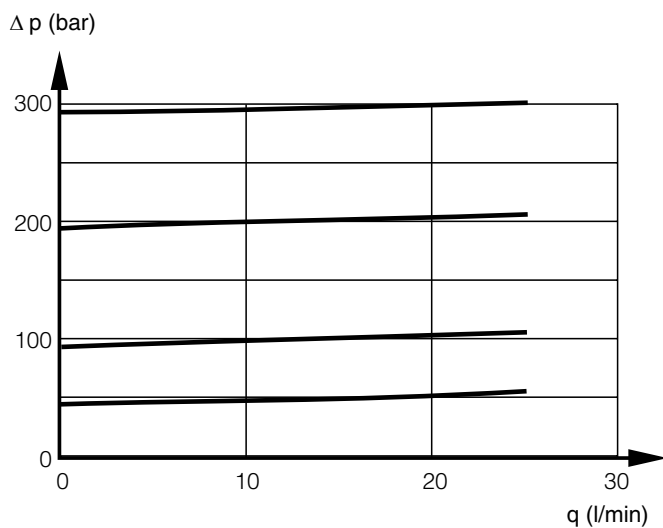


Pressure override characteristics for PLD6

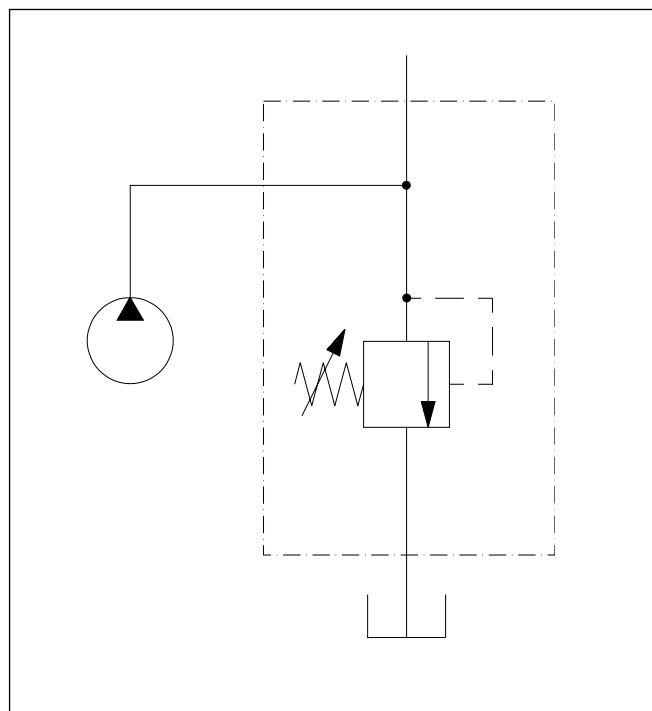

Functional symbol for PLD6

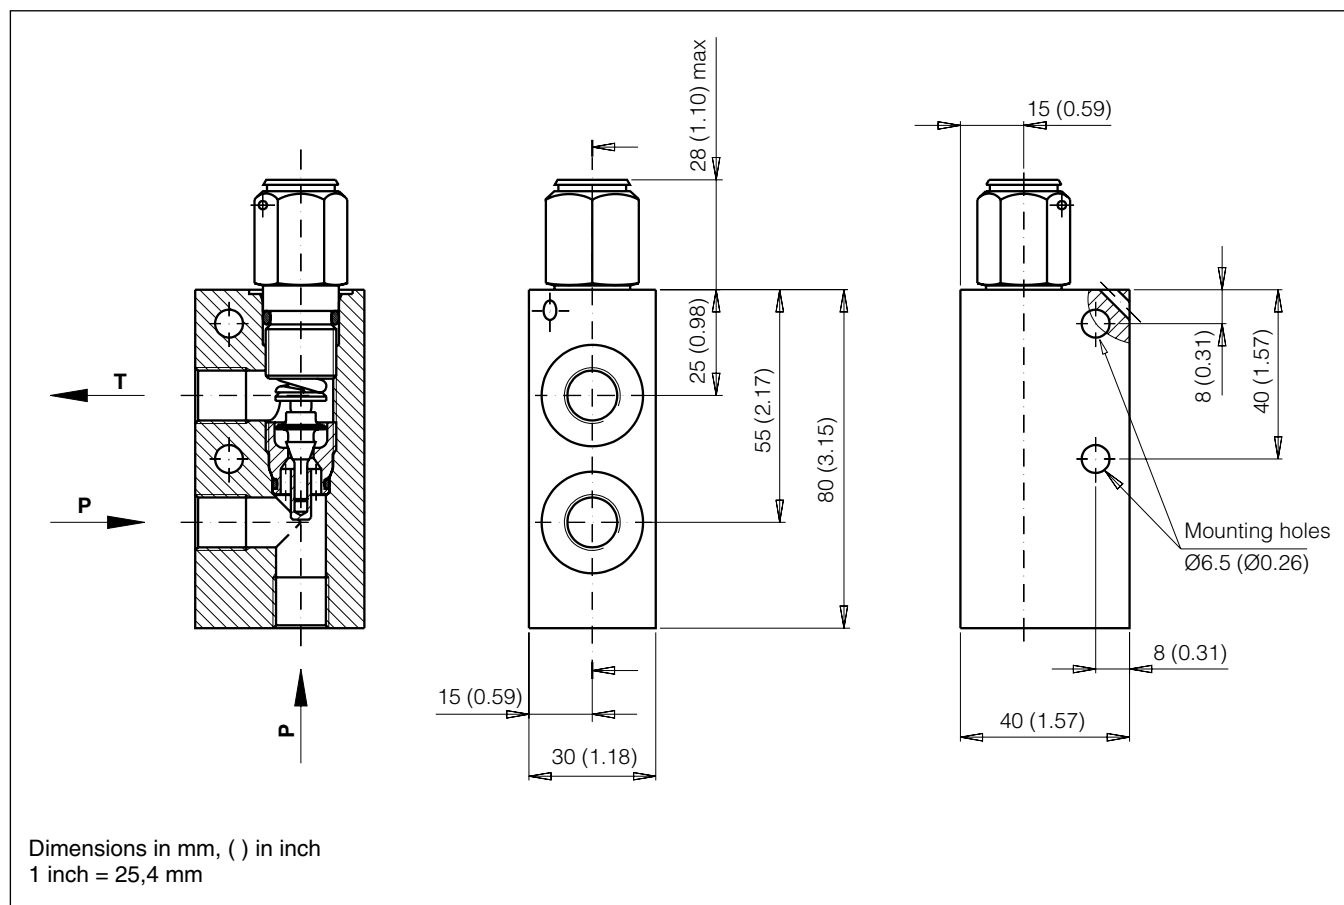

Dimensional drawing - PLD6

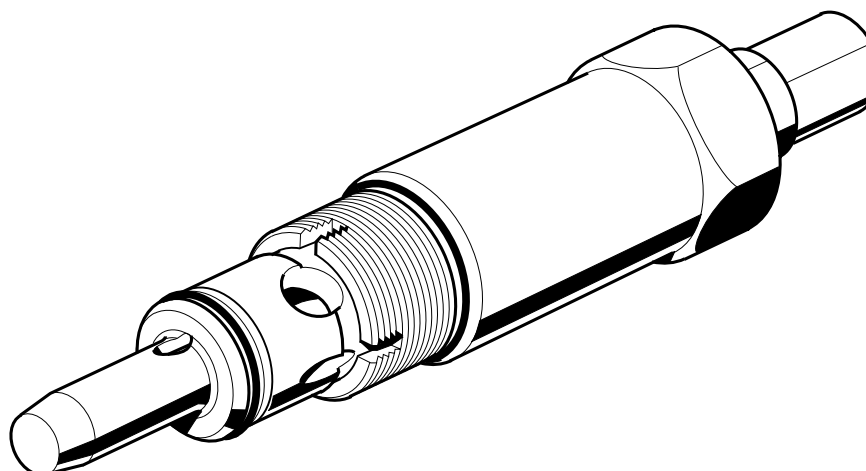

## Applications

The PLD130 is a direct operated pressure relief valve of the cartridge-valve type and is adjustable within 8 different pressure ranges.

The valve is primarily intended for use as a main pressure relief valve in directional valves, but is also very well suited to installation in pumps, motors and function blocks.

## Construction and function

The PLD130 is constructed as a cartridge valve, made up of a number of components such as poppet, seat, spring, spring housing and adjustment screw, which are of high quality, surface hardened steel that is very resistant to corrosion.

The design is such that each adjustment range has a maximal pressure value that is higher than the working pressure. This enables the pressure to be "over-set" during tuning and testing.

The PLD130 is of well-proven design and is used as the main pressure relief valve in several Parker directional valves (a function on which there are great demands). Adjustment is by means of a hexagonal screw with lock-nut.

The setting can be sealed by means of a special plastic cap that is pressed over the adjustment mechanism of the valve. The cap is then sealed by means of sealing wire and lead.

The valve can be supplied factory-set at the desired pressure level, in which case the set values are stated on a sticker on the valve.

## Technical data

### Hydraulic fluids

Best performance is obtained using mineral-base oil of high quality and cleanliness in the hydraulic system.

HLP hydraulic fluids (DIN 51524), automatic-gearbox oil type A and API CD engine oils can be used. Synthetic, fire-resistant and environmentally friendly fluids can also be used. Please contact Parker for further information.

For best function, fluid viscosity should be between 15 and 45 mm<sup>2</sup>/s (cSt).

### General

The data given is applicable at a fluid temperature of 50 °C (122 °F) and viscosity of 30 mm<sup>2</sup>/s using mineral-base oil according to DIN 51524, and when the cartridge valve is mounted in a well defined master block.

### Pressure setting ranges

Working pressure bar/(psi)	Max. pressure bar/(psi)
80-125 (1160-1813)	155 (2248)
126-140 (1814-2030)	170 (2465)
141-160 (2031-2320)	190 (2755)
161-210 (2321-3046)	240 (3840)
211-250 (3047-3626)	280 (4060)
251-280 (3627-4060)	310 (4496)
281-320 (4061-4640)	350 (5076)
321-350 (4641-5076)	380 (5510)

### Filtration

Filtration should be arranged so that Target Contamination Class 20/18/14 according to ISO 4406 is not exceeded.

### Temperature

Temperature range (fluid):

-20 °C to +70 °C (-4 to 158 °F).

Temperature range (ambient):

-40 °C to +60 °C (-40 to 140 °F).

Temperature change: max. 100 °C/s (212 °F).

### Pressure-setting flow

The pressure-setting flow can be either 20 or 60 l/min (5.3 or 15.9 USgpm) through the pressure relief valve (to be specified when ordering).

### Recommended flow rate


Max. 130 l/min (34.3 USgpm).

### Weight


Approx. 0.3 kg (0.7 lb).

## Features and benefits


- Small dimensions - easy to install
- Correct gallery placement - only one tank and one pump gallery needed
- Very tight - no unnecessary leakage losses
- Very good opening and closing characteristics - right pressure regardless of flow
- Very good pressure override characteristics - minimal pressure change between different flows
- Low hysteresis - good pressure-maintaining precision
- Fast acting - quick response to pressure surges
- Built-in maximum pressure setting - greater safety
- Sealable - discourages unauthorized intervention and shows evidence of tampering

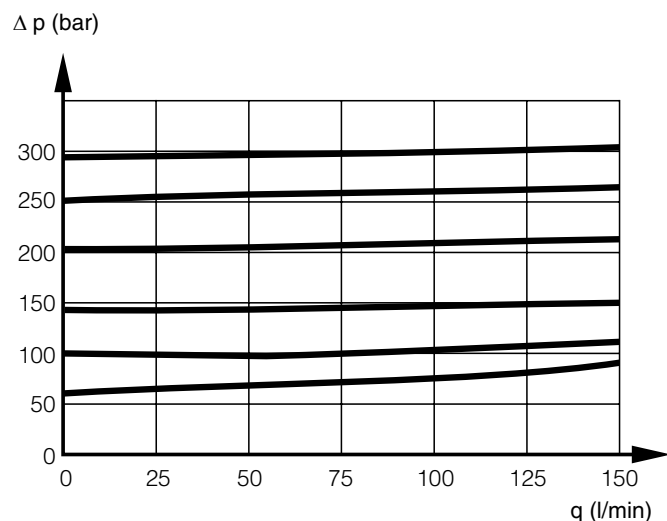

Pressure override characteristics for PLD130.

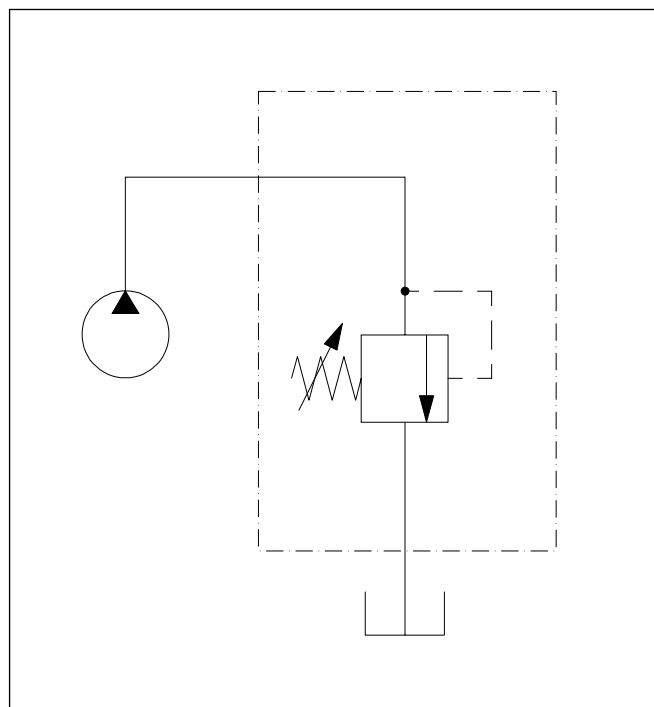

Functional symbol for PLD130.

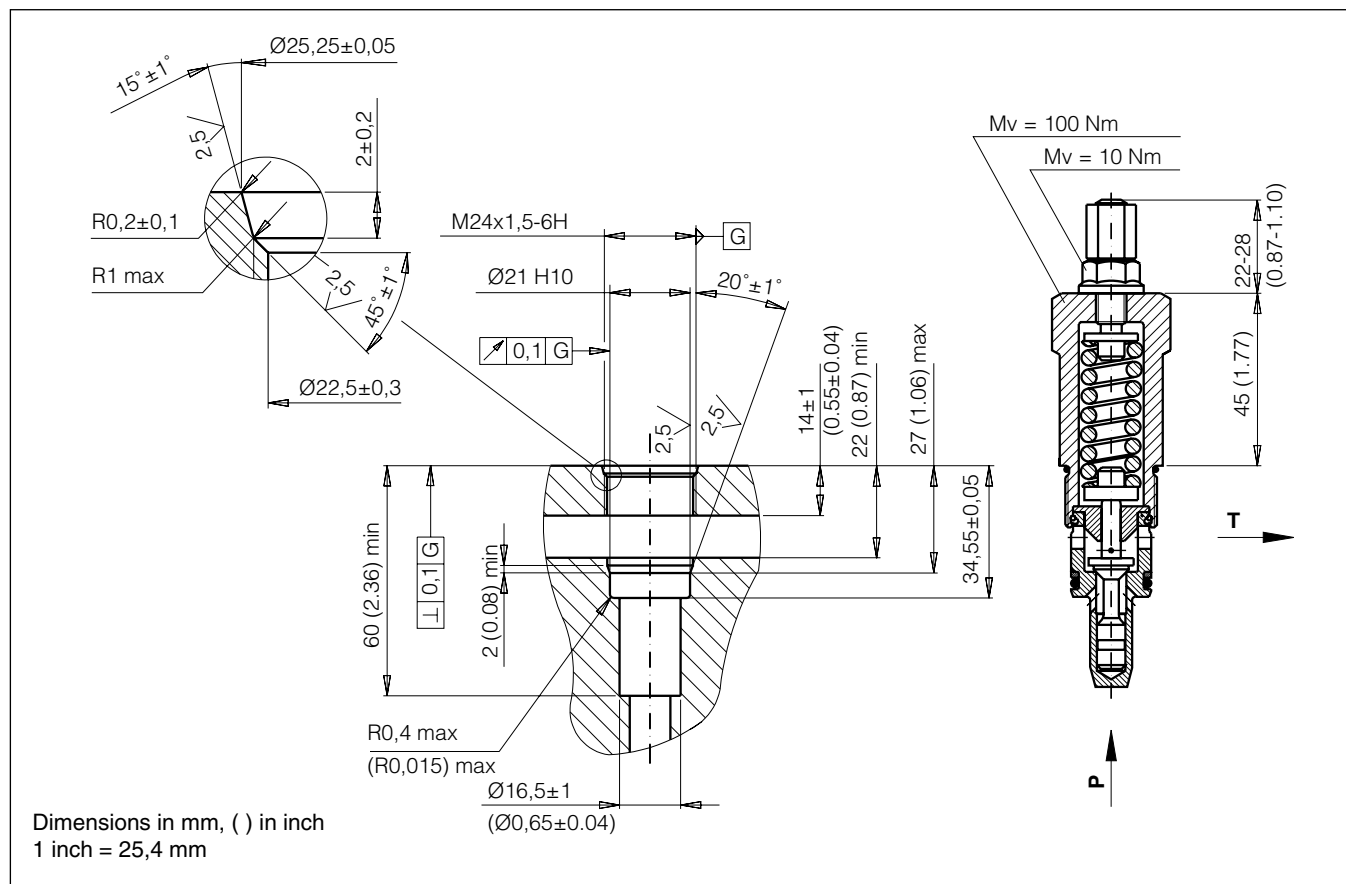


Dimensional and cavity drawing for PLD130 with tightening torques ( $M_v$ ). Tank line should have area of  $>250 \text{ mm}^2$  at  $q = 130 \text{ l/min}$  ( $0.39 \text{ in}^2$  at  $34.3 \text{ USgpm}$ ).

A series of codes have been established to help customers to specify the desired properties when ordering the PLD6 pressure relief valve. The code is incorporated into the basic valve designation as an identifying suffix, e.g. PLD6G-150-P (see "Ordering code" below).

To make ordering easier, certain standard variants have been given 10-digit ordering numbers, as detailed in the table below.

Valve designation	Ordering number	Valve designation	Ordering number
PLD6G-15/70-O	8234 8910 45	PLD6U-15/70-O	8234 0016 51
PLD6G-71/150-O	8234 8910 11	PLD6U-71/150-O	8234 0016 52
PLD6G-151/210-O	8234 8910 29	PLD6U-151/210-O	8234 0016 53
PLD6G-211/300-O	8234 8910 37	PLD6U-211/300-O	8234 0016 54
PLD6G-50-P	8234 0006 05	PLD6U-50-P	8234 0016 05
PLD6G-63-P	8234 0006 06	PLD6U-63-P	8234 0016 06
PLD6G-80-P	8234 0006 08	PLD6U-80-P	8234 0016 08
PLD6G-100-P	8234 0006 10	PLD6U-100-P	8234 0016 10
PLD6G-125-P	8234 0006 12	PLD6U-125-P	8234 0016 12
PLD6G-140-P	8234 0006 14	PLD6U-140-P	8234 0016 14
PLD6G-160-P	8234 0006 16	PLD6U-160-P	8234 0016 16
PLD6G-175-P	8234 0006 17	PLD6U-175-P	8234 0016 17
PLD6G-190-P	8234 0006 19	PLD6U-190-P	8234 0016 19
PLD6G-210-P	8234 0006 21	PLD6U-210-P	8234 0016 21
PLD6G-230-P	8234 0006 23	PLD6U-230-P	8234 0016 23
PLD6G-250-P	8234 0006 25	PLD6U-250-P	8234 0016 25
PLD6G-280-P	8234 0006 28	PLD6U-280-P	8234 0016 28

## Ordering code

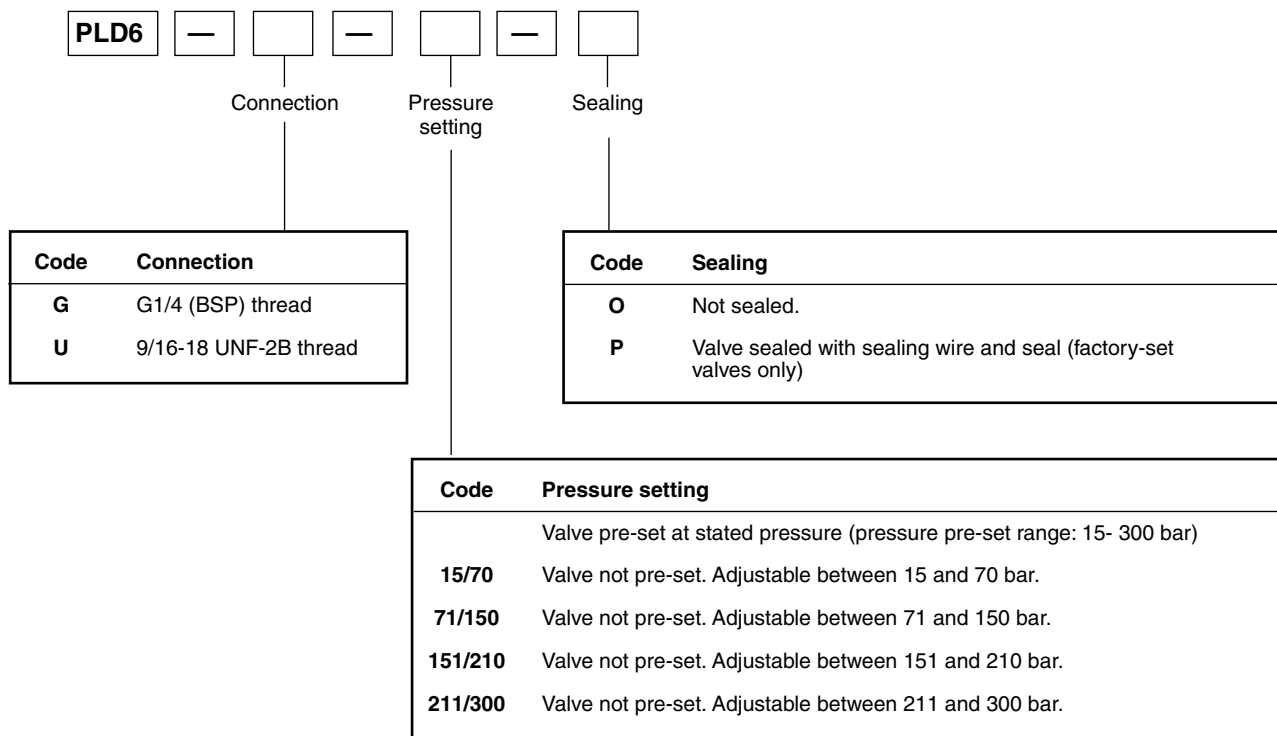


A series of codes have been established to help customers to specify the desired properties when ordering the PLD130 pressure relief valve. The code is incorporated into the basic valve designation as an identifying suffix, e.g. PLD130-150/20 (see "Ordering code" below).

To make ordering easier, certain standard variants have been given 10-digit ordering numbers, as detailed in the table below.

Valve designation	Ordering number
PLD130-80/20	8234 0130 08
PLD130-100/20	8234 0130 10
PLD130-125/20	8234 0130 12
PLD130-140/20	8234 0130 14
PLD130-160/20	8234 0130 16
PLD130-175/20	8234 0130 17
PLD130-190/20	8234 0130 19
PLD130-210/20	8234 0130 21
PLD130-230/20	8234 0130 23
PLD130-250/20	8234 0130 25
PLD130-280/20	8234 0130 28
PLD130-320/20	8234 0130 32
PLD130-350/20	8234 0130 35
Plastic cap for sealing	9120 0999 68

### Ordering code

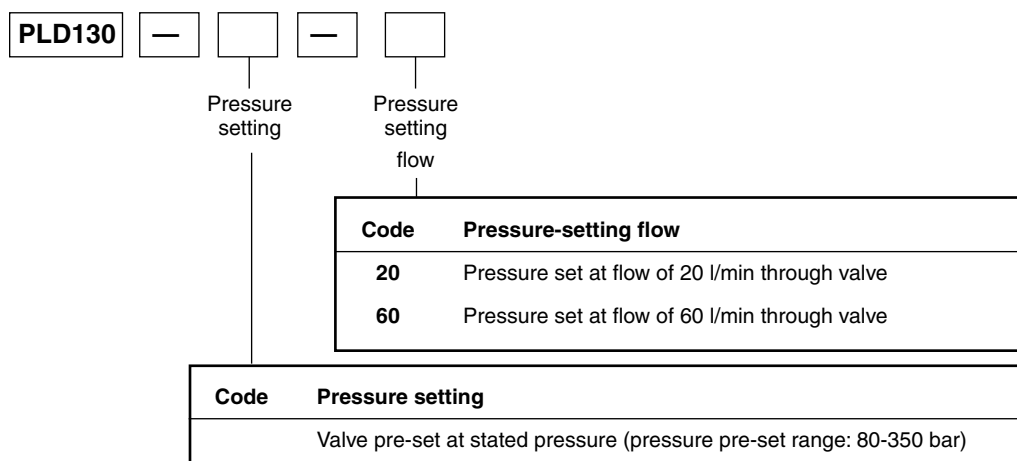

## WARNING – USER RESPONSIBILITY

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

## Offer of Sale

Please contact your Parker representation for a detailed "Offer of Sale".

# Parker Worldwide

## Europe, Middle East, Africa

### **AE – United Arab Emirates,** Dubai

Tel: +971 4 8127100  
parker.me@parker.com

### **AT – Austria,** Wiener Neustadt

Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

### **AT – Eastern Europe,** Wiener Neustadt

Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

### **AZ – Azerbaijan,** Baku

Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

### **BE/LU – Belgium,** Nivelles

Tel: +32 (0)67 280 900  
parker.belgium@parker.com

### **BY – Belarus,** Minsk

Tel: +375 17 209 9399  
parker.belarus@parker.com

### **CH – Switzerland,** Etoy

Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

### **CZ – Czech Republic,** Klecany

Tel: +420 284 083 111  
parker.czechrepublic@parker.com

### **DE – Germany,** Kaarst

Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

### **DK – Denmark,** Ballerup

Tel: +45 43 56 04 00  
parker.denmark@parker.com

### **ES – Spain,** Madrid

Tel: +34 902 330 001  
parker.spain@parker.com

### **FI – Finland,** Vantaa

Tel: +358 (0)20 753 2500  
parker.finland@parker.com

### **FR – France,** Contamine s/Arve

Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

### **GR – Greece,** Athens

Tel: +30 210 933 6450  
parker.greece@parker.com

### **HU – Hungary,** Budapest

Tel: +36 1 220 4155  
parker.hungary@parker.com

### **IE – Ireland,** Dublin

Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

### **IT – Italy,** Corsico (MI)

Tel: +39 02 45 19 21  
parker.italy@parker.com

### **KZ – Kazakhstan,** Almaty

Tel: +7 7272 505 800  
parker.easteurope@parker.com

### **NL – The Netherlands,** Oldenzaal

Tel: +31 (0)541 585 000  
parker.nl@parker.com

### **NO – Norway,** Asker

Tel: +47 66 75 34 00  
parker.norway@parker.com

### **PL – Poland,** Warsaw

Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

### **PT – Portugal,** Leca da Palmeira

Tel: +351 22 999 7360  
parker.portugal@parker.com

### **RO – Romania,** Bucharest

Tel: +40 21 252 1382  
parker.romania@parker.com

### **RU – Russia,** Moscow

Tel: +7 495 645-2156  
parker.russia@parker.com

### **SE – Sweden,** Spånga

Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

### **SK – Slovakia,** Banská Bystrica

Tel: +421 484 162 252  
parker.slovakia@parker.com

### **SL – Slovenia,** Novo Mesto

Tel: +386 7 337 6650  
parker.slovenia@parker.com

### **TR – Turkey,** Istanbul

Tel: +90 216 4997081  
parker.turkey@parker.com

### **UA – Ukraine,** Kiev

Tel: +380 44 494 2731  
parker.ukraine@parker.com

### **UK – United Kingdom,** Warwick

Tel: +44 (0)1926 317 878  
parker.uk@parker.com

### **ZA – South Africa,** Kempton Park

Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

### **CA – Canada,** Milton, Ontario

Tel: +1 905 693 3000

### **US – USA,** Cleveland

(industrial)  
Tel: +1 216 896 3000

### **US – USA,** Elk Grove Village

(mobile)  
Tel: +1 847 258 6200

## Asia Pacific

### **AU – Australia,** Castle Hill

Tel: +61 (0)2-9634 7777

### **CN – China,** Shanghai

Tel: +86 21 2899 5000

### **HK – Hong Kong**

Tel: +852 2428 8008

### **IN – India,** Mumbai

Tel: +91 22 6513 7081-85

### **JP – Japan,** Fujisawa

Tel: +81 (0)4 6635 3050

### **KR – South Korea,** Seoul

Tel: +82 2 559 0400

### **MY – Malaysia,** Shah Alam

Tel: +60 3 7849 0800

### **NZ – New Zealand,** Mt Wellington

Tel: +64 9 574 1744

### **SG – Singapore**

Tel: +65 6887 6300

### **TH – Thailand,** Bangkok

Tel: +662 717 8140

### **TW – Taiwan,** Taipei

Tel: +886 2 2298 8987

## South America

### **AR – Argentina,** Buenos Aires

Tel: +54 3327 44 4129

### **BR – Brazil,** Sao Jose dos

Campos  
Tel: +55 12 4009 3500

### **CL – Chile,** Santiago

Tel: +56 2 623 1216

### **MX – Mexico,** Apodaca

Tel: +52 81 8156 6000

### **VE – Venezuela,** Caracas

Tel: +58 212 238 5422

Ed. 2010-11-30

### EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL,  
IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

### US Product Information Centre

Toll-free number: 1-800-27 27 537

www.parker.com

